



液压双头倒角机 Hydraulic double beveling machine

产品特点:

- 1、圆管圆棒端面内外角，均可一次完成倒角及修面动作，快速准确。
- 2、加工物件与刀盘的中心线准确不变，刀盘经过特殊设计、刀片规格化、调整刀片简易快速。
- 3、自动进料，自动夹持，自动进退刀，两端材料同时加工，确保材料长度精度，速度快，效率高。
- 4、更换不同尺寸的工件，只须做简单的刀盘及更换夹模调整。非标机台长度可以做到3000mm，管径可以做到Φ110mm。
- 5、加工时速3-6秒/件。了解更多，请致电咨询。




技术参数/Technical parameters

型号 Model	DX50D300	DX50D550	DX50D1000	DX50E300	DX50E550	DX50E1000
加工管/棒长Processing tube / rod length(mm)	100-300	100-550	100-1000	25-250	25-500	25-1000
加工管径Pipe Diameter forWorking	Φ5-15mm		Φ16-50mm			
加工棒径 Processing rod diameter(mm)	Φ5-30 mm					
使用刀头 Applicable Bit	1200（根据不同材料定速度 According to different material constant)					
马达 Motor(HP)	2HP×4P					
转速 Rotational speed	1200					
适合材质 Suitable material	钢，铁，铝，铜，不锈钢等各种管件及棒材 Steel, iron, aluminum, copper, stainless steel and other tube and bar..					
机械标准附件 Standard mechanical accessories	1、标准倒角刀盘1组 1、the standard chamfering cutter 1 groups 2、圆形夹具1组 2、1 groups of circular clamp					
液压泵 Hydraulic pump	2 HP					
压力 Pressure	15-20kg					
工作电压 Working voltage	380V（三相四线）50H			380V（50H three-phase four wire）		
机械尺寸 Machinery Dimensions(Wx D x H)(mm)	1600X980x950	1920x980x950	2460x980x950	1600X980x950	1920x980x950	2460x980x950

全自动双头倒角机 Full Automatic double chamfering machine series




Product feature:

- 1、round tube and rod end and angle, can be a complete chamfer and shaving action, fast and accurate.
- 2、the processing objects with the cutter plate centerline exactly the same, cutter specially designed blade, blade, simple and quick adjustment.
- 3、automatic feeding, automatic clamping, automatic knife advance and retreat, two materials processing at the same time, to ensure that the material length precision, fast speed, high efficiency
- 4、replacing the workpieces of different sizes, just do a simple cutter disc and replacing the clamping adjustment. Non standard length of machine can do 3000mm, DiameterΦ 110mm can do
- 5、processing speed 3-6 seconds / parts. To learn more, please call the advisory.

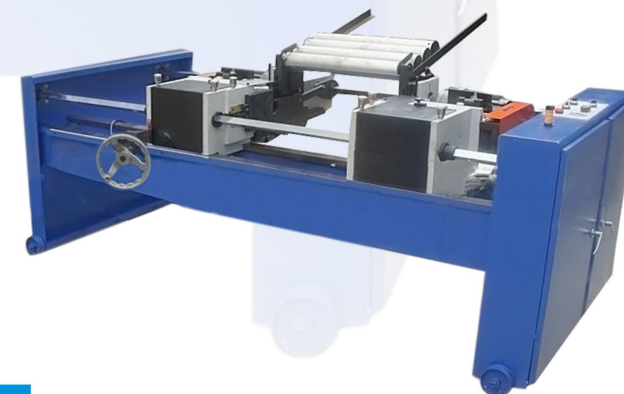

技术参数/Technical parameters


型号 Model	DX85F550	DX85F1000	DX110G550	DX110G1000
加工管/棒长Processing tube / rod length(mm)	50-500	50-1000	50-500	50-1000
加工管径Pipe Diameter forWorking	Φ20-85mm		Φ30-110 mm	
使用刀头 Applicable Bit	Φ20-85mm		Φ30-110 mm	
马达 Motor(HP)	2HP×4P		3HP×6P	
转速 Rotational speed	1200（根据不同材料定速度 According to different material constant)			
适合材质 Suitable material	钢，铁，铝，铜，不锈钢等各种管件 Steel, iron, aluminum, copper, stainless steel pipe fittings such as			
机械标准附件 Standard mechanical accessories	1、标准倒角刀盘1组 1、the standard chamfering cutter 1 groups 2、圆形夹具1组 2、1 groups of circular clamp			
使用压缩机 The use of compressors	6-8 (kg/cm²)			
工作电压 Working voltage	380V（三相四线）50H 380V（50H three-phase four wire）			
机械尺寸 Machinery Dimensions(Wx D x H)(mm)	1780x1150x950	2320x1150x950	1780x1250x950	2320x1250x950



全自动双头倒角机 Automatic double-headed chamfering machine






产品特点:

- 1、圆管圆棒端面内外角，均可一次完成倒角及修面动作，快速准确。
- 2、加工物件与刀盘的中心线准确不变，刀盘经过特殊设计、刀片规格化、调整刀片简易快速。
- 3、自动进料，自动夹持，自动进退刀，两端材料同时加工，确保材料长度精度，速度快，效率高。
- 4、更换不同尺寸的工件，只须做简单的刀盘及更换夹模调整。非标机台长度可以做到3000mm，管径可以做到Φ100mm。
- 5、加工时速3~4秒/件。了解更多，请致电咨询。

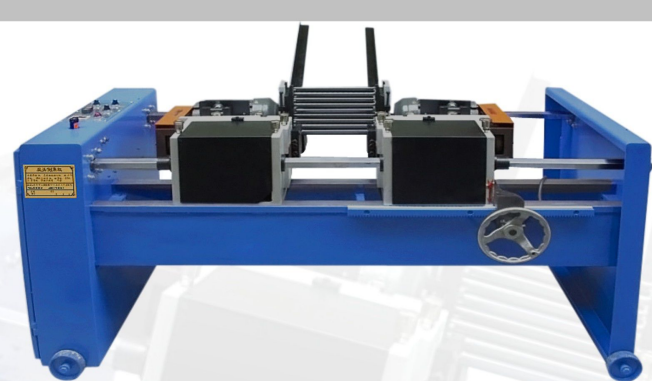

技术参数/Technical parameters

型号 Model	Dx50300	Dx50550	Dx501000	DX50A300	DX50A550	DX50A1000
加工管/棒长Processingtube /rod length(mm)	100-300	100-550	100-1000	25-250	25-500	25-1000
加工管径 Pipe Diameter for Working	Φ5-15mm		Φ16-50mm			
加工棒径 Processing rod diameter(mm)	Φ5-30 mm					
使用刀头 Applicable Bit	管材 Pipe: Φ5-15mm 16-50mm		棒材 Bar: Φ5-12 mm Φ13-30 mm			
马达 Motor(HP)	2HP×4P					
转速 Rotational speed	1200（根据不同材料定速度 According to different material constant）					
适合材质 Suitable material	钢，铁，铝，铜，不锈钢等各种管件及棒材 Steel, iron, aluminum, copper, stainless steel and other tube and bar..					
机械标准附件 Standard echanical accessories	1、标准倒角刀盘1组 1、the standard chamfering cutter 1 groups 2、圆形夹具1组 2、1 groups of circular clamp					
使用压缩机 The use of compressors	6-8 (kg/cm^2)					
工作电压 Working voltage	380V（三相四线）50H		380V（50H three-phase four wire）			
机械（长x宽x高）Machinery（Wx Dx H）(mm)	1460x980x950	1780x980x950	2320x980x950	1460x980x950	1780x980x950	2320x980x950



全自动双头倒角机 Automatic double-headed chamfering machine

Product features:

- 1、round tube and rod end and angle, can be a complete chamfer and shaving action, fast and accurate.
- 2、the processing objects with the cutter plate center line exactly the same, cutter specially designed blade, blade, simple and quick adjustment.
- 3、automatic feeding, automatic clamping, automatic knife advance and retreat, two materials processing at the same time, to ensure that the material length precision, fast speed, high efficiency.
- 4、replacing the workpieces of different sizes, just do a simple cutter disc and replacing the clamping adjustment. Non standard length of machine can do 3000mm, DiameterΦ 100mm can do.
- 5、processing speed 3-4 seconds / parts. To learn more, please call the Advisory.



技术参数/Technical parameters

型号 Model	DX50B300	DX50B550	DX50B1000	DX50C300	DX50C550	DX50C1000
加工管/棒长Processingtube /rod length(mm)	100-300	100-550	100-1000	25-250	25-500	25-1000
加工管径 Pipe Diameter for Working	Φ5-15mm			Φ16-50mm		
加工棒径 Processing rod diameter(mm)	Φ5-30 mm					
使用刀头 Applicable Bit	管材 Pipe: Φ5-15mm 16-50mm		棒材 Bar: Φ5-12 mm		Φ13-30 mm	
马达 Motor(HP)	2HP×4P					
转速 Rotational speed	1200（根据不同材料定速度 According to different material constant)					
适合材质 Suitable material	钢，铁，铝，铜，不锈钢等各种管件及棒材 Steel, iron, aluminum, copper, stainless steel and other tube and bar.。					
机械标准附件 Standard echanical accessories	1、标准倒角刀盘1组 1、the standard chamfering cutter 1 groups 2、圆形夹具1组 2、1 groups of circular clamp					
使用压缩机 The use of compressors	6-8 (kg/cm^2)					
工作电压Working voltage	380V（三相四线）50H			380V（50H three-phase four wire）		
机械(长x宽x高) Machinery (Wx Dx H)(mm)	1600X980x950	1920x980x950	2460x980x950	1600x980x950	1920x980x950	2460x980x950